


Linear Motion Guide 微型直线导轨

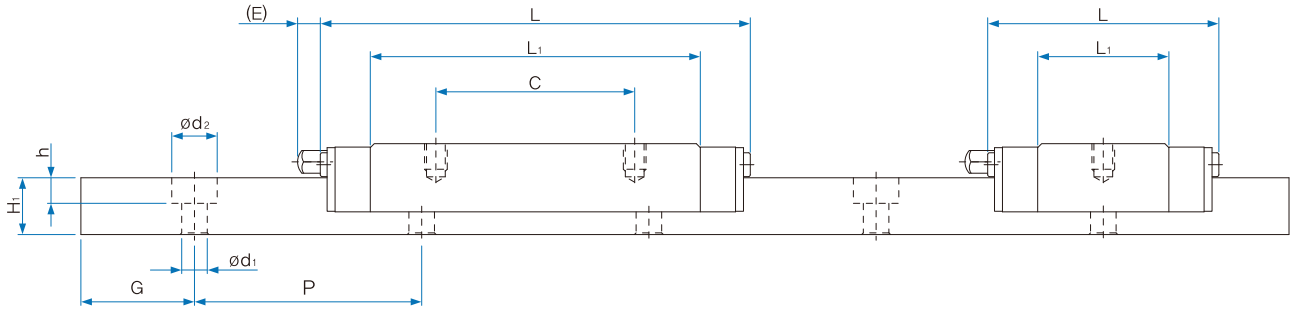

单位 : mm

轨道尺寸								基本额定负荷		静态容许力矩 N · m					质量	
宽 W ₁	W ₂	W ₃	W ₄	高 H ₁	G	端距 P	d ₁ × d ₂ × h	C N	C ₀ N	M _p		M _y		M _r	滑块 g	轨道 g/m
										单滑块	双滑块紧靠	单滑块	双滑块紧靠	单滑块		
10 ⁰ _{-0.025}	3.5	-	-	4	5	20	29×48×16	668	1,094	2.6	13.3	2.6	13.3	5.63	5.3	299
								806	1,430	4.4	21.4	4.4	21.4	7.36	6.8	
14 ⁰ _{-0.05}	5.5	-	-	5.5	10	30	35×6×3,2	1,102	1,514	3.4	19.5	3.4	19.5	10.83	11.7	560
								1,631	2,650	10.1	51.1	10.1	51.1	18.95	18.9	
								2,166	3,975	22.5	106.1	22.5	106.1	28.42	27.9	
18 ⁰ _{-0.05}	6	-	-	7	10	30	35×6×4,5	1,515	2,121	6.2	33.4	6.2	33.4	19.41	23.4	912
								2,197	3,606	18.2	87.6	18.2	87.6	33.00	39.6	
								2,878	5,303	37.8	172.9	37.8	172.9	48.52	54.9	
24 ⁰ _{-0.05}	8	-	-	8.5	15	40	45×8×4,5	2,753	3,339	10.3	57.3	10.3	57.3	40.73	40.5	1369
								4,015	5,723	31.2	152.2	31.2	152.2	69.83	68.4	
								5,539	9,062	73.8	338.7	73.8	338.7	110.56	99.9	
30 ⁰ _{-0.05}	10	-	-	9	15	40	45×8×4,5	3,694	4,351	14.3	82.8	14.3	82.8	66.1	60.0	2086
									7,599	43.7	219.3	43.7	219.3	115.5	103.8	
								7,576	12,142	111.5	517.4	111.5	517.4	184.6	165.5	
42 ⁰ _{-0.05}	9	23	9.5	9.5	15	40	45×8×4,5	4,954	6,056	26.9	145.3	26.9	145.3	128.40	85.5	2886
								6,579	9,085	62.5	306.5	62.5	306.5	192.60	126.0	
								9,076	14,384	147.8	680.6	147.8	680.6	304.94	183.6	

1N≐0.102kgf

